AIPHONE®

IS-SS-2RA

Stainless Steel Flush Mount Door Station with
Standard & Emergency Call Buttons

-INSTRUCTIONS-

The IS-SS-2RA is a stainless steel flush mount door station with standard and emergency call buttons. The unit is equipped with ADA compliant lettering and Braille signage for both the standard and emergency buttons. A call status indicator is included to meet ADA rescue assistance requirements. The IS-SS-2RA must be programmed as a video door station and must connect to the IS-CCU or IS-SCU control units.

IS-SS-2RA

PACKAGE CONTENTS:



IS-SS-2RA
Vandal-resistant Door Station



Security Driver

Blank name placard



Semi-flush backbox & tamper-resistant screws

NAMES & FUNCTIONS:

1. Microphone
2. Speaker
3. Name Placard
4. Call status indicator
5. Signage with Braille
6. Call button
7. Emergency button

FEATURES:

- Audio communication with calling area
- Two call buttons: Standard and Emergency
- ADA compliant lettering and Braille signage
- LED call status indicator
- CCTV input (Analog NTSC 1Vpp)
- Red mushroom button for emergency call
- Two programmable relay outputs for activation of external systems/devices
- Name placard
- Stainless steel faceplate with tamper resistant screws

INSTALLATION:

- For flush mounting, cut a hole in the wall and use supplied back box.
  Box dimensions are:
  11-1/16” H x 5-7/8” W x 1-3/4” D

- For surface mounting, use the SBX-ISDVFRA surface mount box. This box can mount to a standard 1-gang box or to any flat surface.

WIRING DIAGRAM:

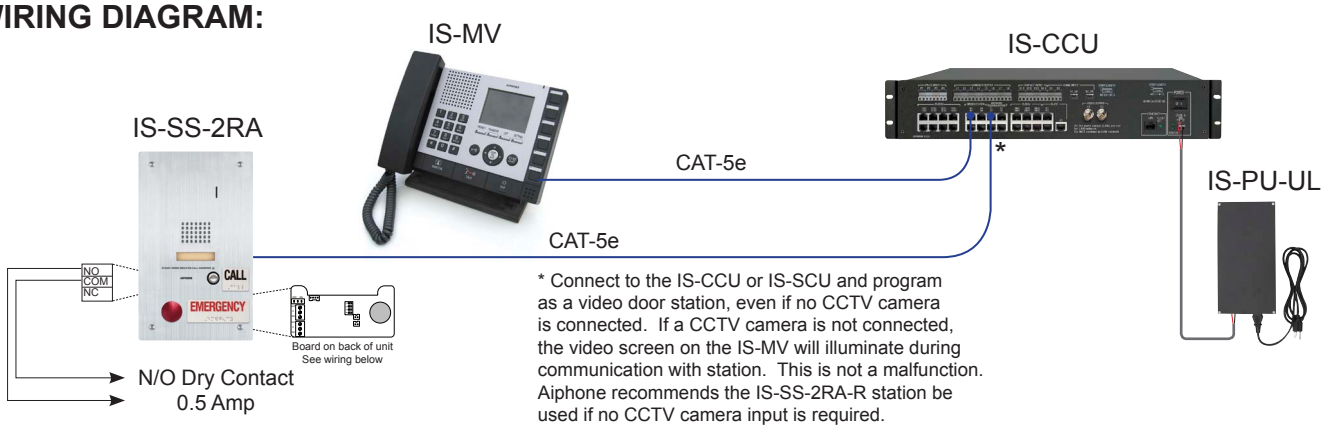

* Connect to the IS-CCU or IS-SCU and program as a video door station, even if no CCTV camera is connected. If a CCTV camera is not connected, the video screen on the IS-MV will illuminate during communication with station. This is not a malfunction. Aiphone recommends the IS-SS-2RA-R station be used if no CCTV camera input is required.

RELAY BOARD WIRING AND SETTINGS:

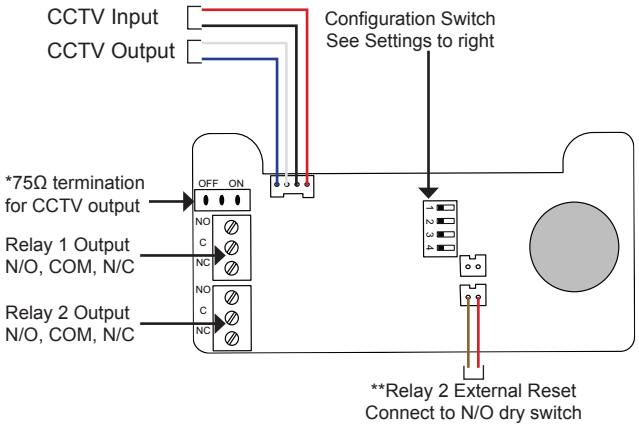

* Unit is shipped with the pin connector set to the ON position. Change pin connector to the OFF position to loop the video signal from the CCTV output.

Default Configuration when shipped

Relay 1 triggers on normal call, emergency call, and communication. Relay 1 remains on during communication.
Relay 2 triggers on emergency call and remains on during communication.



Trigger Source	RY1 Triggered?	RY1 Remains ON During Talking?	RY2 Triggered?	RY2 Remains ON During Talking?	RY2 Requires Reset?
Normal Call	YES	YES	NO	N/A	N/A
Emergency Call	YES	YES	YES	YES	NO
Talking	YES	YES	NO	N/A	N/A
Door Release	NO	N/A	NO	N/A	N/A

Optional Configuration

Relay 1 triggers on normal call, emergency call, and communication. Relay 1 remains on during communication.
Relay 2 triggers on an emergency call and remains on during communication. Relay 2 requires reset.



Trigger Source	RY1 Triggered?	RY1 Remains ON During Talking?	RY2 Triggered?	RY2 Remains ON During Talking?	RY2 Requires Reset?
Normal Call	YES	YES	NO	N/A	N/A
Emergency Call	YES	YES	YES	YES	YES**
Talking	YES	YES	NO	N/A	N/A
Door Release	NO	N/A	NO	N/A	N/A

Contact Technical Support if additional switch configurations are required.

SPECIFICATIONS:

Terminations:	RJ45 jack for audio/video Screw terminals for door release and relay outputs
Relay rating:	24V AC/DC 0.5A on Door station, 24V AC/DC 1.0A on relay board
Camera Input:	Analog NTSC 1Vpp
Operating Temp:	14° ~ 140°F / -10° ~ 60°C
Wiring Distance:	980’ with Cat5e/6 cable
Dimensions:	11-3/4” H x 7” W
w/SBX-ISDVFRA:	11-11/16” H x 7-1/16” W x 2-13/16” D (top), 1-13/16” D (bottom)

FCC WARNING:
This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference that may cause undesired operation.

- For proper regulatory compliance, the drain wire should be disconnected at the power supply end of the cable.
- Changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

Aiphone Corporation
1700 130th AVE NE * Bellevue, WA 98005
Ph: (800) 692-0200 * Fax: (425) 455-0071
tech@aiphone.com

TOLL FREE TECHNICAL SUPPORT:
(800) 692-0200
E-MAIL: tech@aiphone.com